


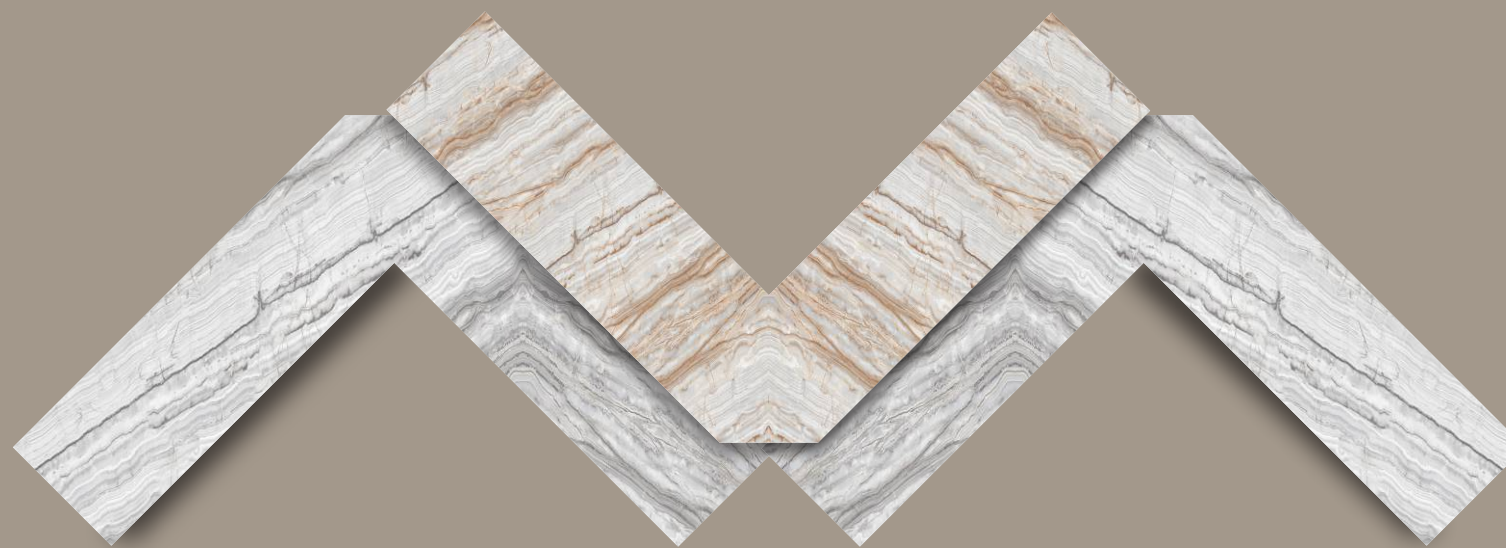

EXPLORE THE INFINITY

BOOKMATCH SERIES

600x1200mm

EXPAND YOUR PERSPECTIVE
BOOKMATCH SERIES
600x1200mm

The 600x1200mm tiles evoke the essence of grandeur in a space with their exuberant charm and timeless designs. The bookmatch style of these tiles creates a larger-than-life interior that one never wants to stay away from!



FEATURES



HIGH DURABILITY



EASY INSTALLATION



ANTI SLIP SURFACE



EASY MAINTENANCE




HYGIENIC SURFACE



FIRE & WATER RESISTANCE



**A M A Z O N E
W H I T E**

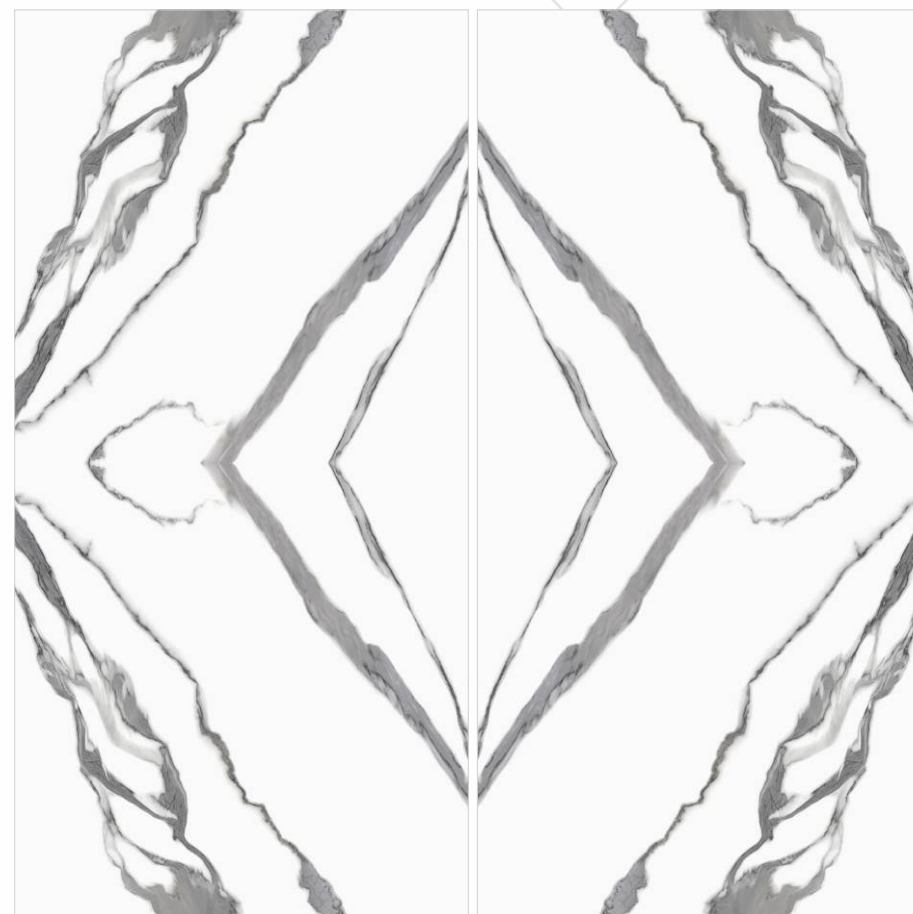

BOOKMATCH SERIES
600x1200mm

AMAZONE WHITE - 600x1200mm





**CANDY
BROWN ONYX**



BOOKMATCH SERIES
600x1200mm

CANDY BROWN ONYX - 600x1200mm



A large, light grey diamond shape is positioned in the upper right quadrant of the page, serving as a background for the product name.

**CANDY
GREY ONYX**



BOOKMATCH SERIES
600x1200mm

CANDY GREY ONYX - 600x1200mm






**CASTEL
BEIGE**



BOOKMATCH SERIES
600x1200mm

CASTEL BEIGE - 600x1200mm



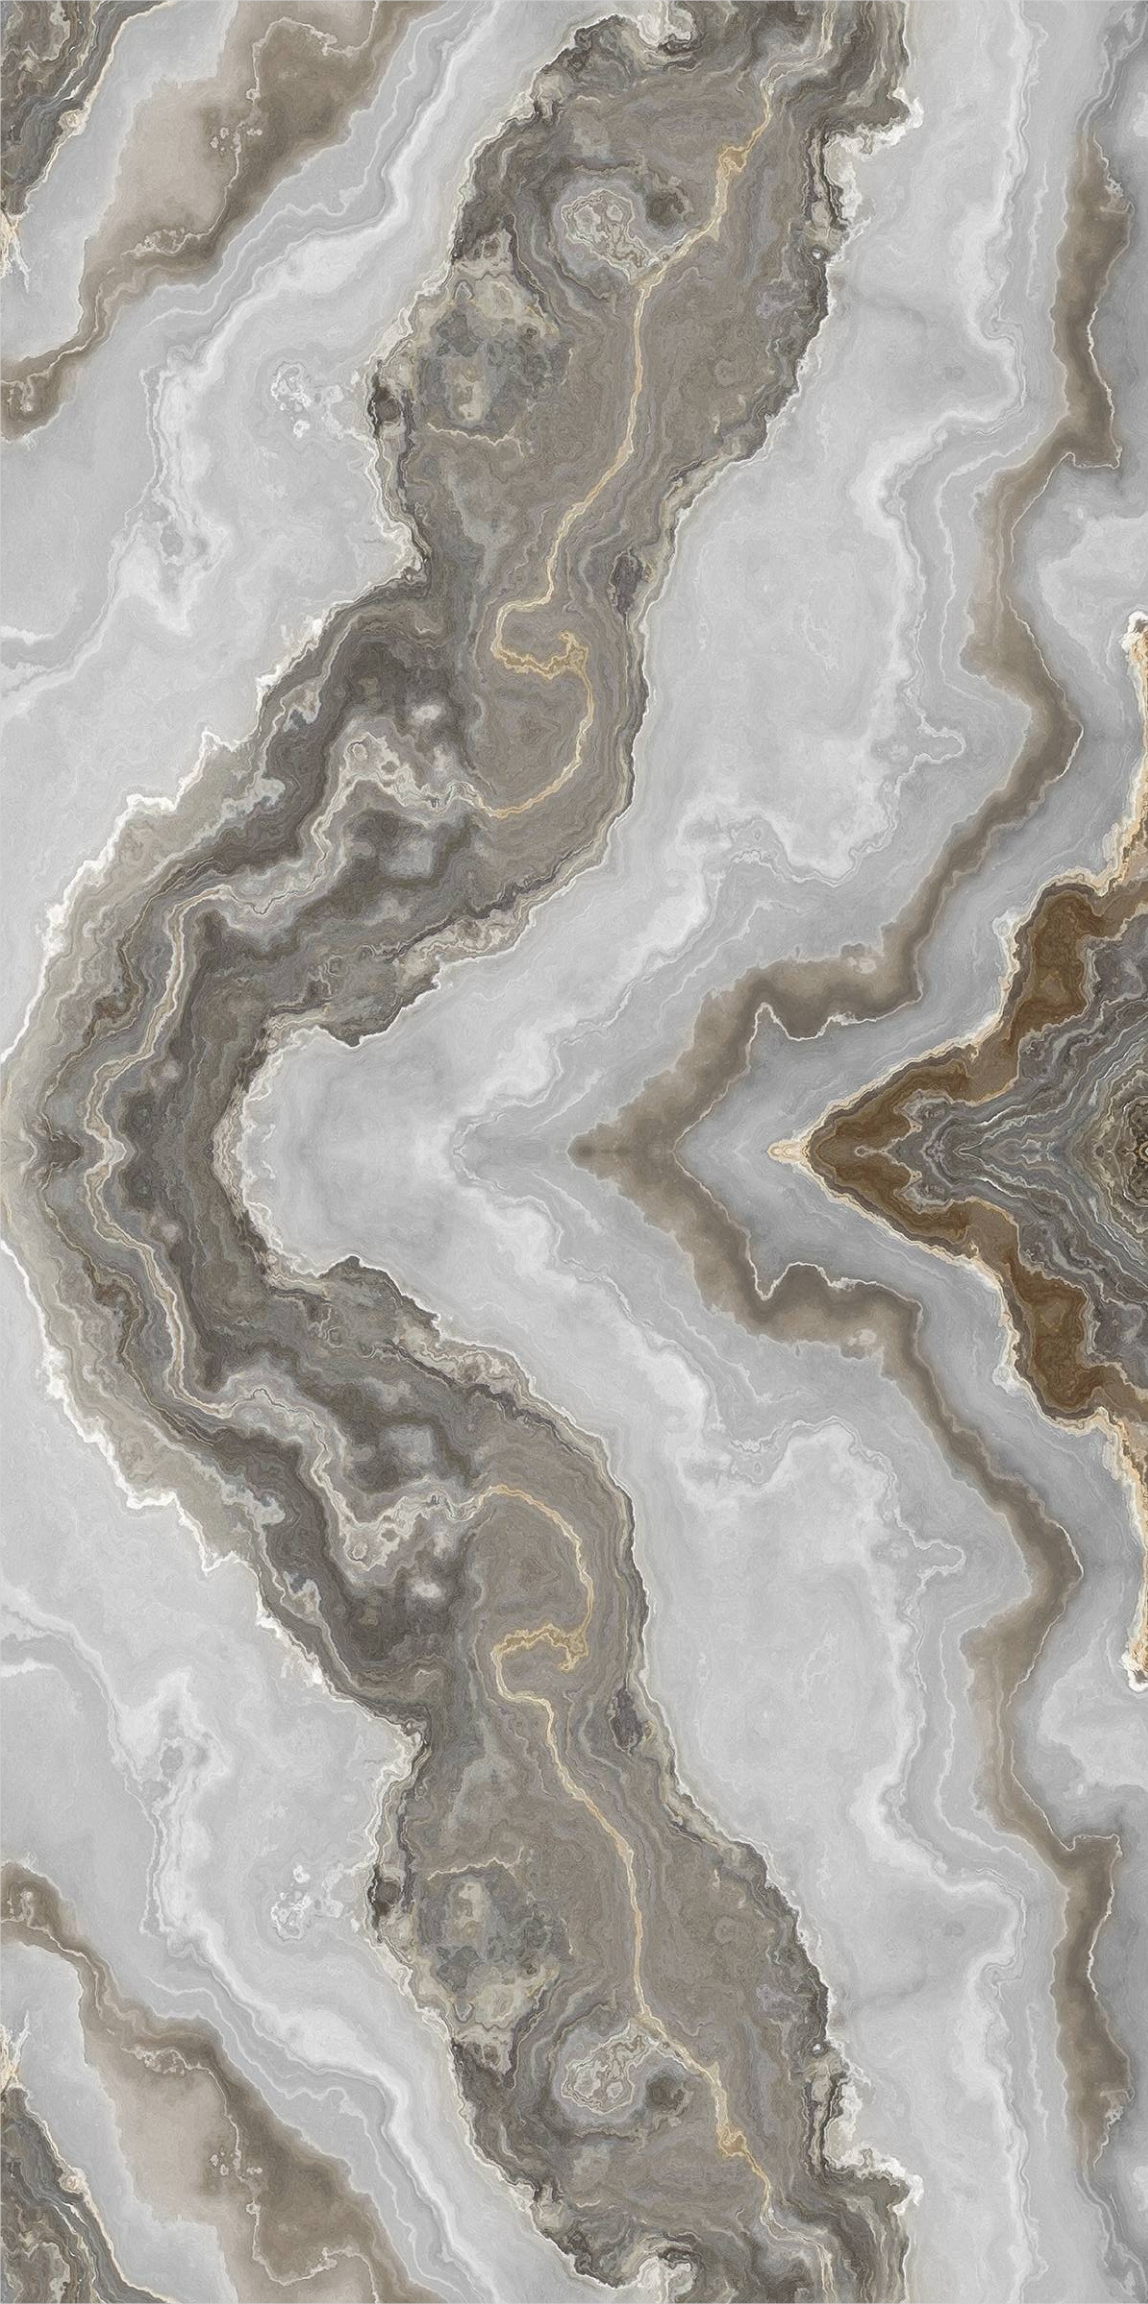

**CREAMLINE
ONYX**



BOOKMATCH SERIES
600x1200mm

CREAMLINE ONYX - 600x1200mm





**EDEN
DARK**



BOOKMATCH SERIES
600x1200mm

EDEN DARK - 600x1200mm





**ESTRADA
ORA**



BOOKMATCH SERIES
600x1200mm

ESTRADA ORA - 600x1200mm





**FIRE
RED**




BOOKMATCH SERIES
600x1200mm

FIRE RED - 600x1200mm






**GALAXY
WHITE**

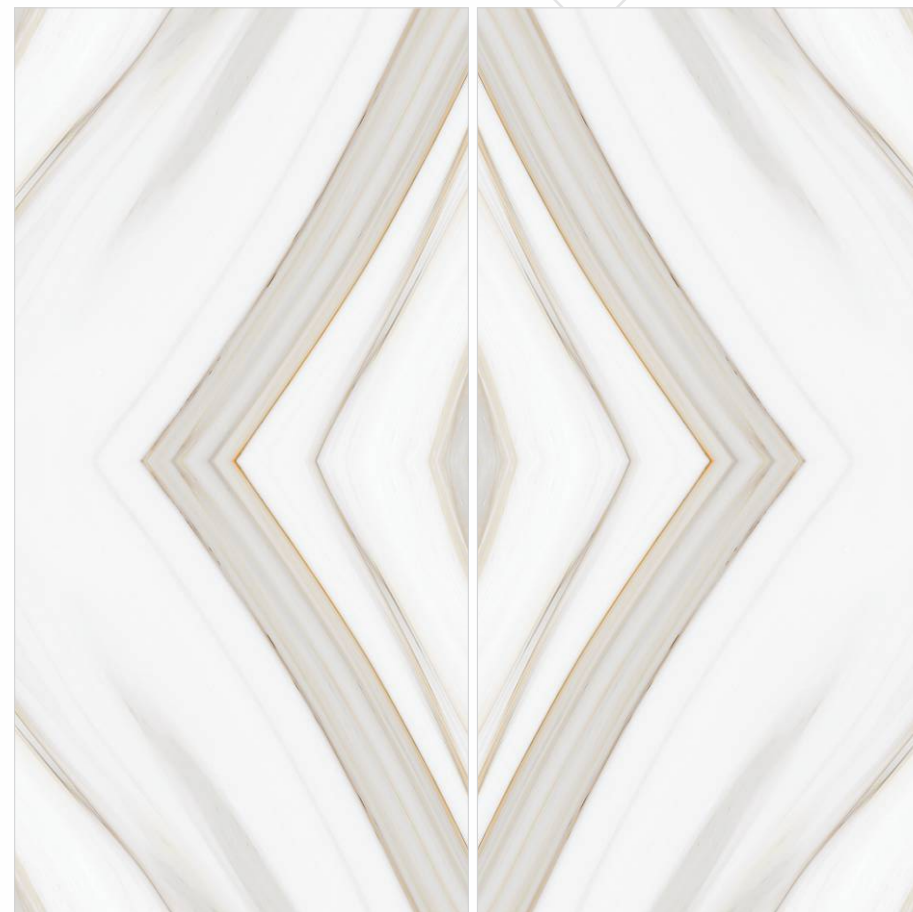


BOOKMATCH SERIES
600x1200mm

GALAXY WHITE - 600x1200mm



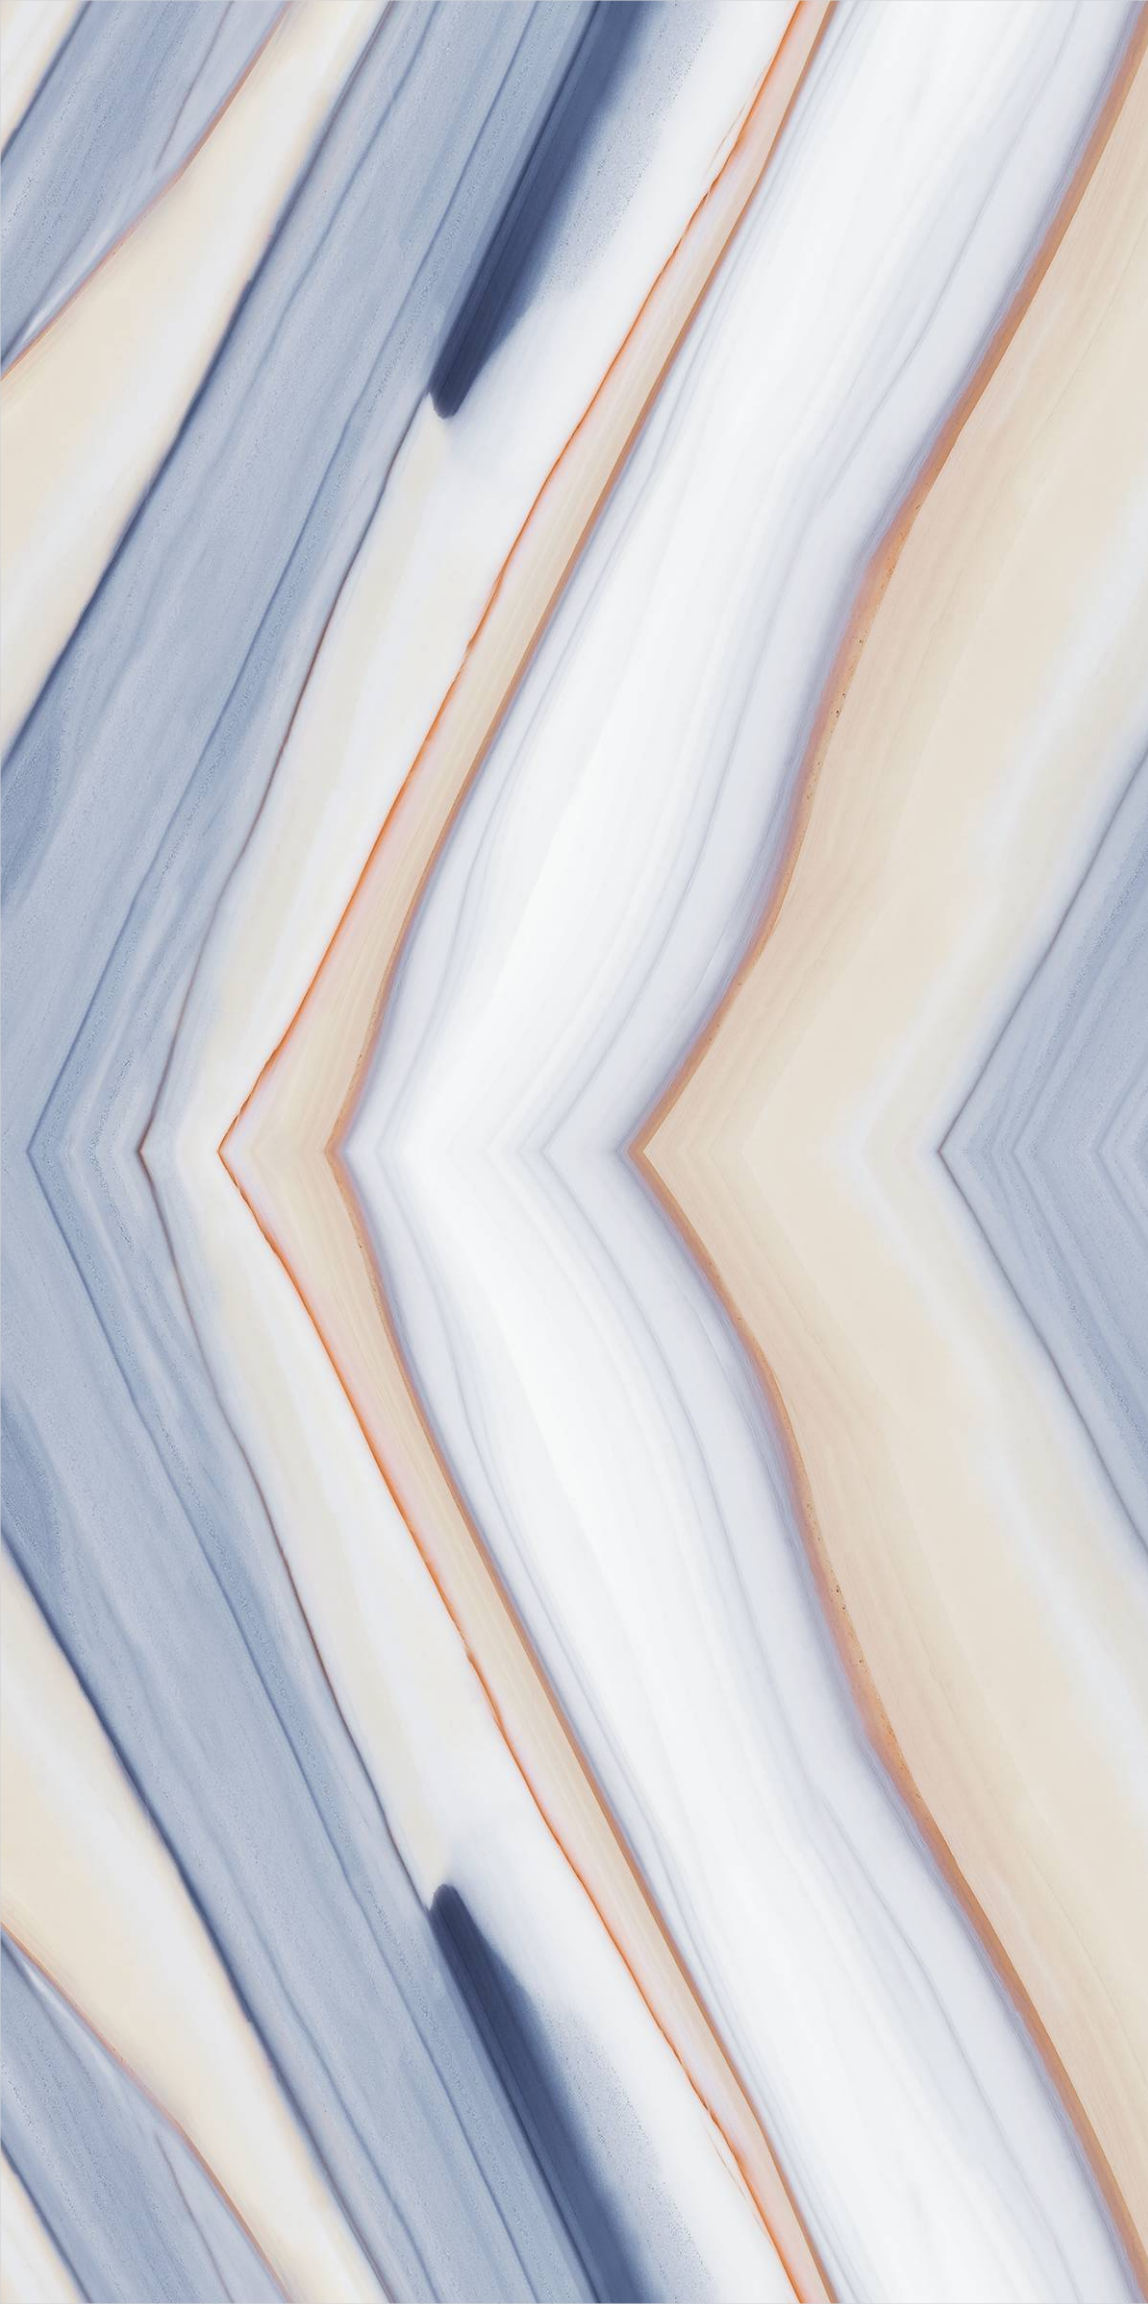

**LIQUI
BLUE**

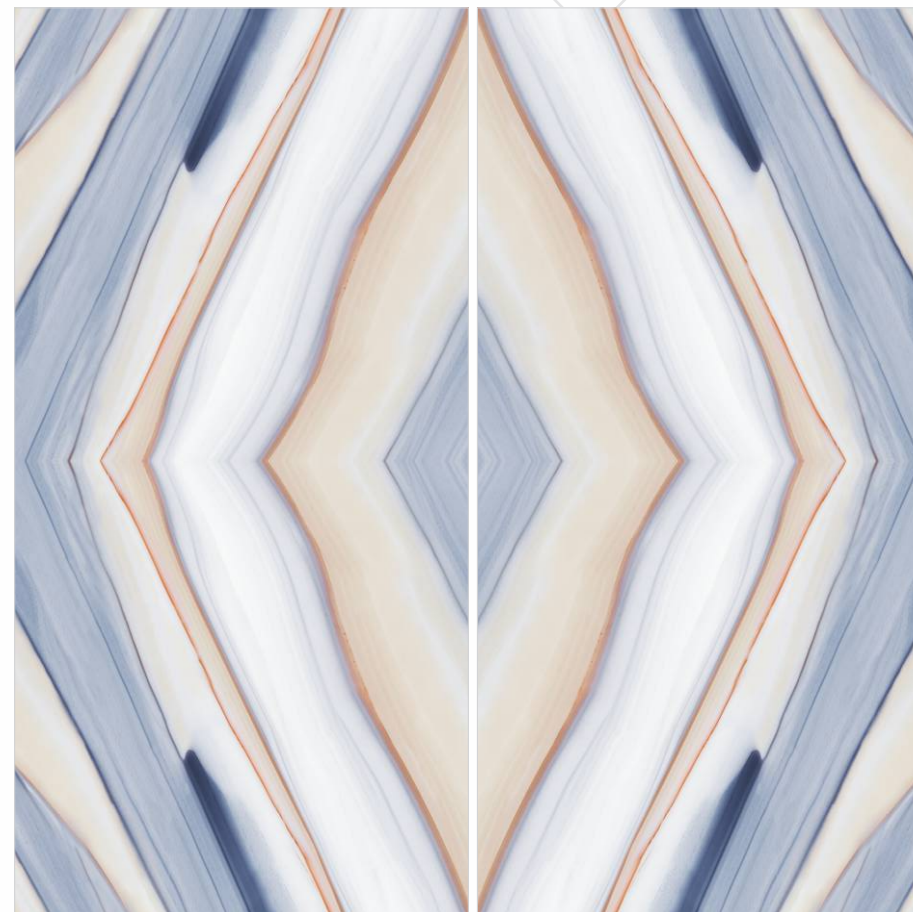


BOOKMATCH SERIES
600x1200mm

LIQUI BLUE - 600x1200mm






**SIENNA
SKY**

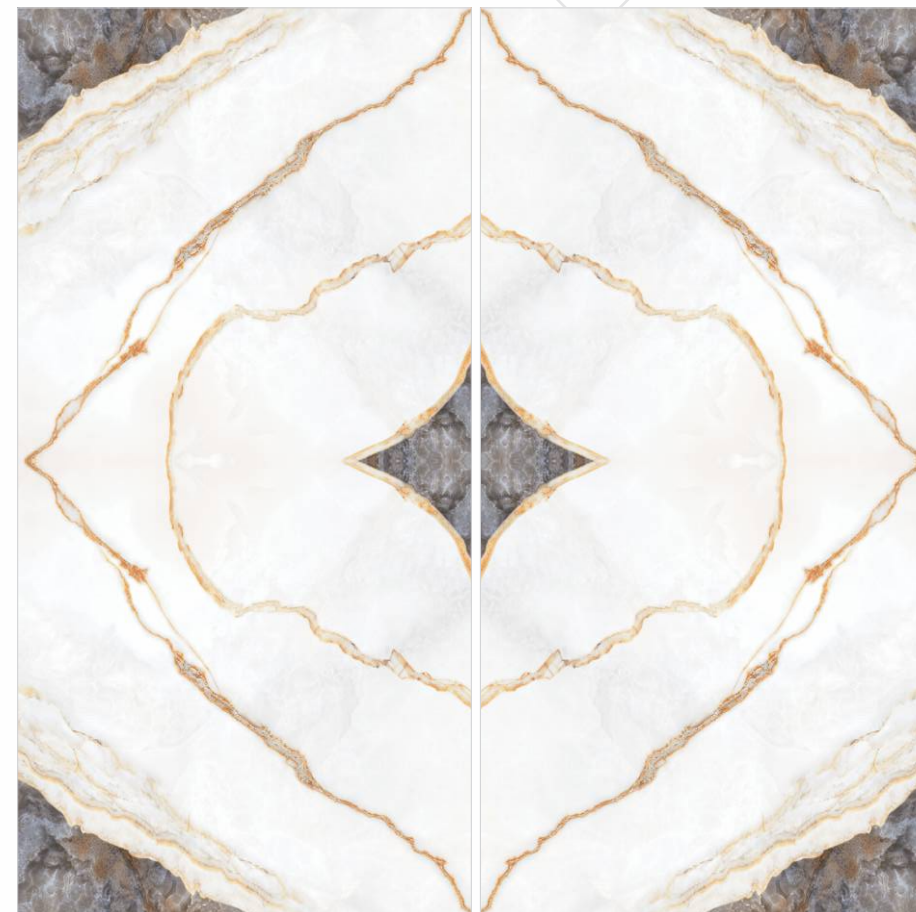


BOOKMATCH SERIES
600x1200mm

SIENNA SKY - 600x1200mm



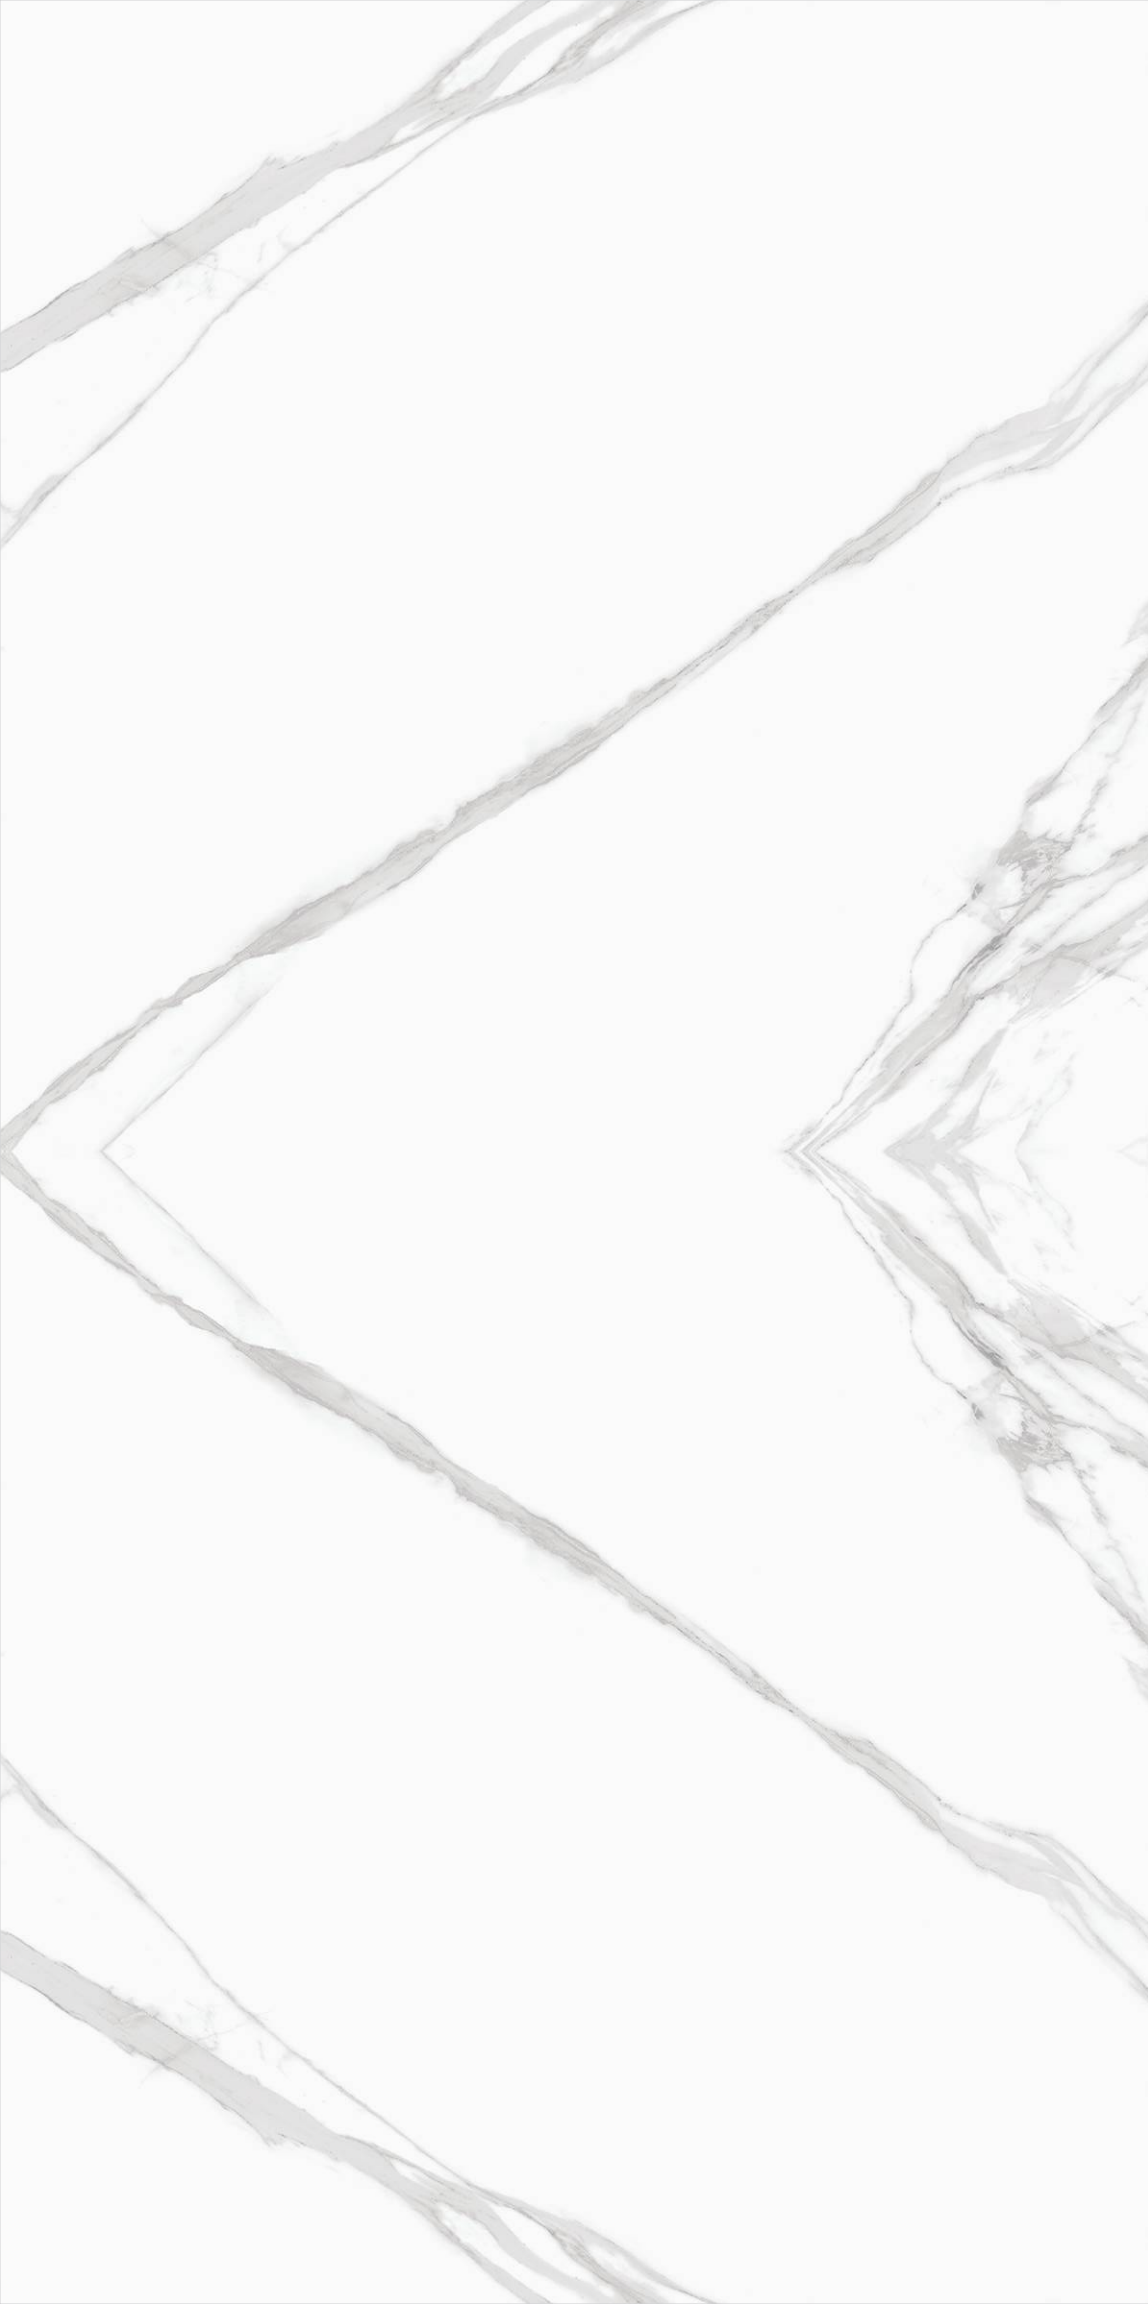

**SPARKLE
STATUARIO**

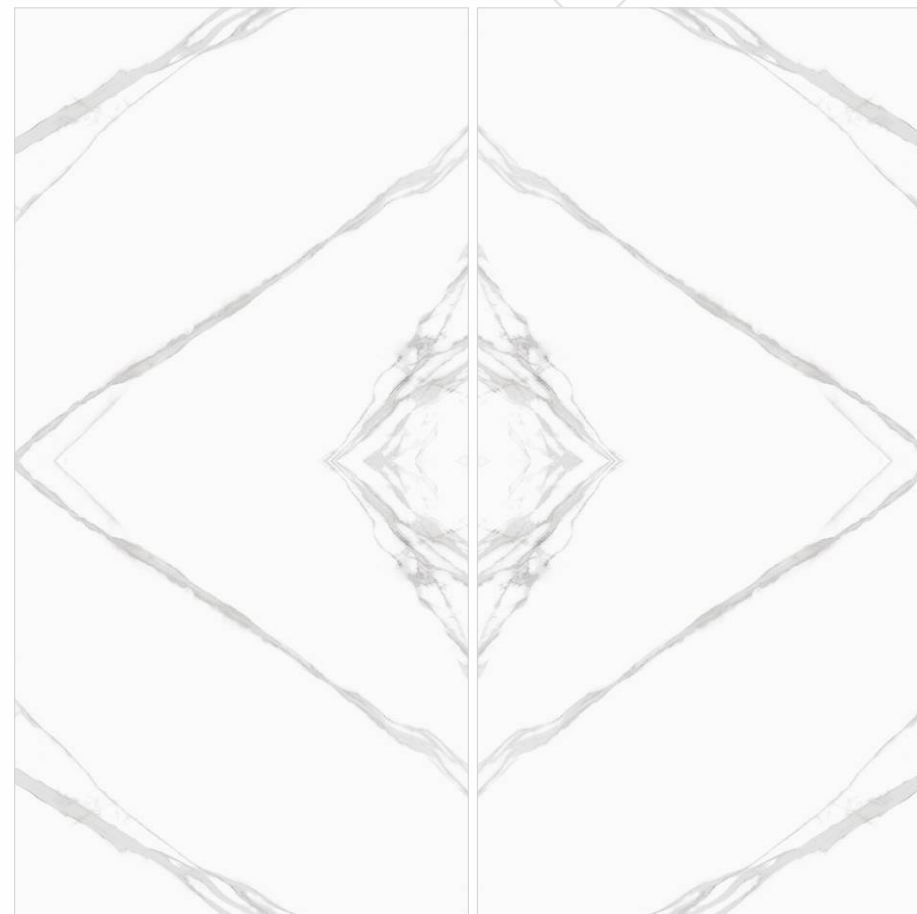


BOOKMATCH SERIES
600x1200mm

SPARKLE STATUARIO - 600x1200mm





**VISTA
WAVE**

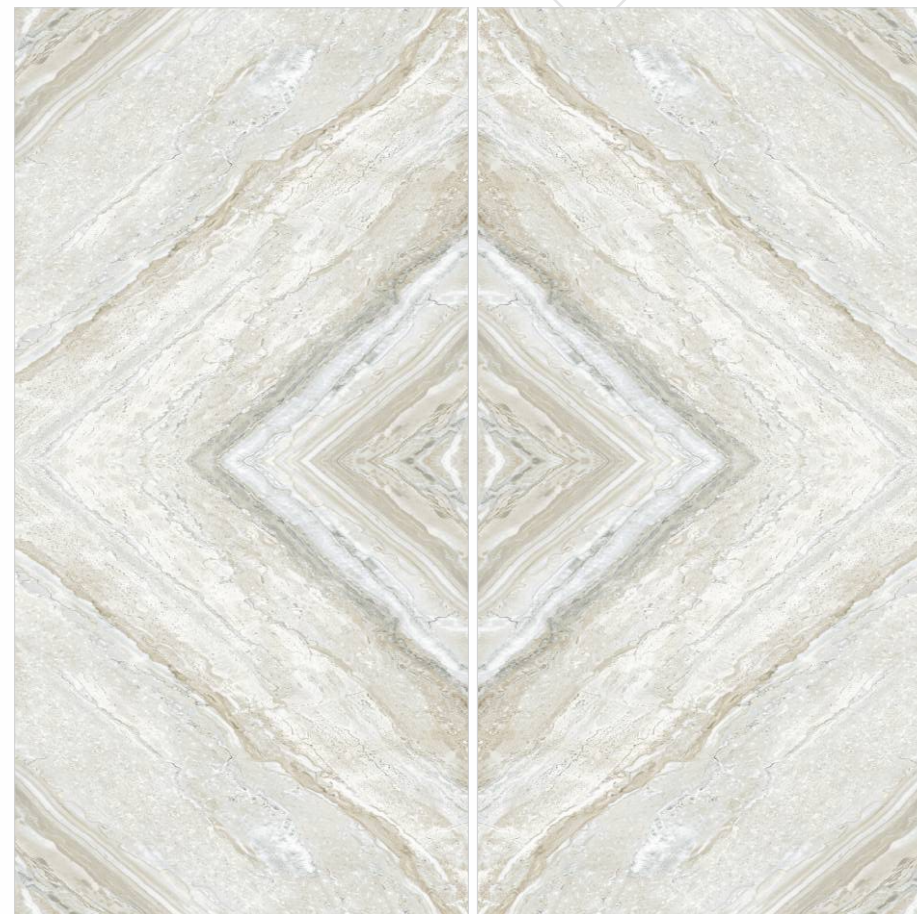

BOOKMATCH SERIES
600x1200mm

VISTA WAVE - 600x1200mm



TECHNICAL
SPECIFICATION

GLAZED PORCELAIN TILES - POLISHED (PGVT)

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP BIa	OUR VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.1%	ISO-10545-2
Deviation in thickness	± 5.0%	± 4.0%	ISO-10545-2
Straightness in sides	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Surface quality	Min. 95% defect free	> 95%	ISO 10545-2
Colour difference	Unaltered	Unaltered	ISO-10545-16
Glossiness	> 90 GU	> 94 GU	Gloss meter 60°
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.20 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	> 35 N/mm2	> 40 N/mm2	ISO-10545-4
Breaking strength	> 1300 N	> 1800 N	ISO-10545-4
Impact resistance (COR)	>0.55	>0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	Declared class	Class PEI 3	EN 154
Surface scratch hardness (Mohs scale)	5	5	EN 101
THERMO HYGROMRTRIC PROPERTIES			
Frost resistance	Test passed in accordance with test method	Pass	ISO-10545-12
Thermal shock resistance	Min. 10 cycle	Pass	ISO-10545-9
Moisture expansion	0.06mm/m	0.01mm/m	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10	Max. 6.5 x 10	ISO-10545-8
Crazing resistance	No damage	No damage	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14
SEFETY PROPERTIES			
Slip resistance (COF)	Declared value	> 0.40 dry, <0.40 wet	ISO-10545-17
Reaction to fire	Class A1 or A1 fl	Class A1 - A1fl	N.A

PACKING
DETAILS

Size	Thickness	psc. / box	m² / box
600x1200mm	9 mm (Approx.)	2 pcs	1.44 Sq. Mtr.

