

"CLASSIC ELEGANCE OF ELEMENTS"




Ignite®

600 x 1200 mm
FULL BODY TILES









600x1200mm

Matt & Glossy
Finish

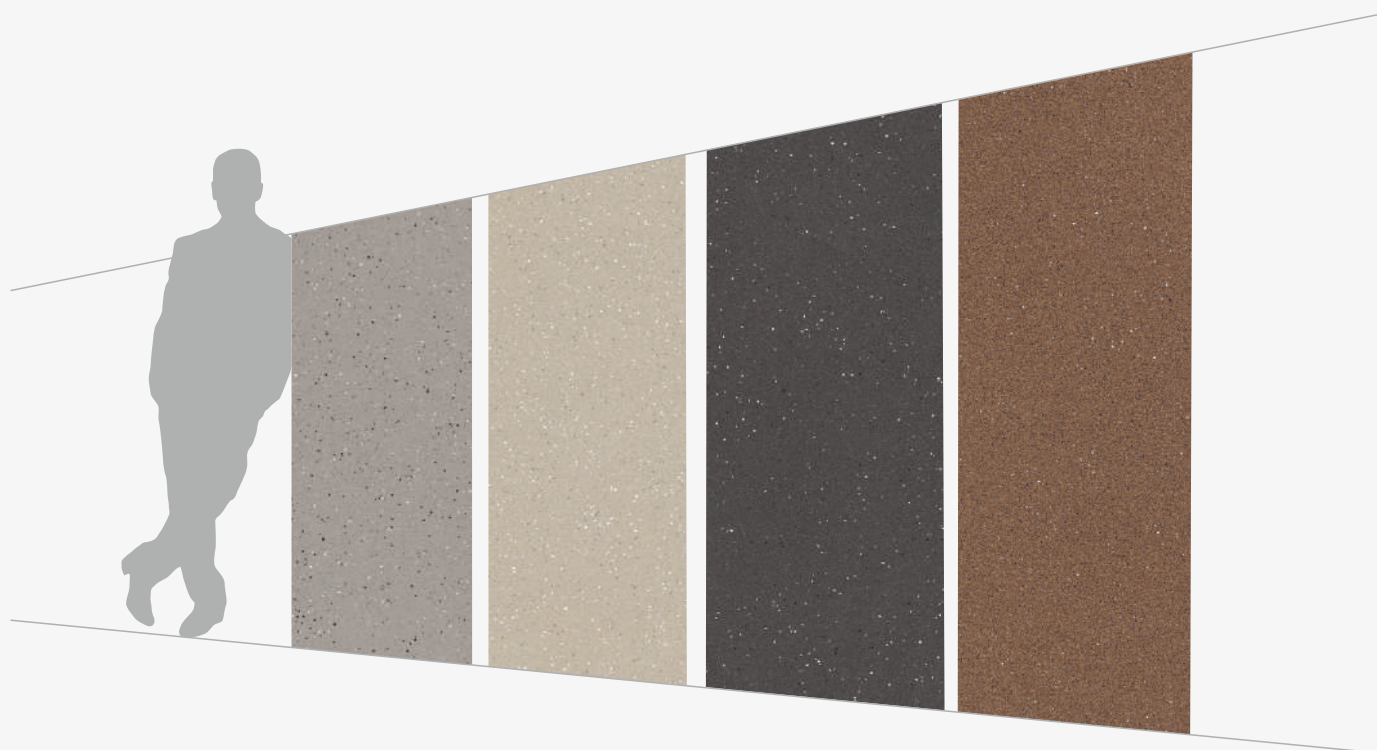

Timeless
elegance in the
widest color palette



Advantages



Applications Area



KITCHEN



INTERIOR



WALL COVERING



RESIDENTIAL



COMMERCIAL



GYM



HOSPITALS



URBAN CENTERS



AVAILABLE IN
MATT & GLOSSY

TERRAZZO STAR WHITE

600x1200mm

-



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



AVAILABLE IN
MATT & GLOSSY

TERRAZZO PEARL

600x1200mm

-



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



AVAILABLE IN
MATT & GLOSSY

TERRAZZO WALNUT

600x1200mm

-



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



AVAILABLE IN
MATT & GLOSSY

TERRAZZO FERN

600x1200mm

-



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH



AVAILABLE IN
MATT & GLOSSY

TERRAZZO STONE

600x1200mm

-



ZERO
MAINTENANCE




IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH

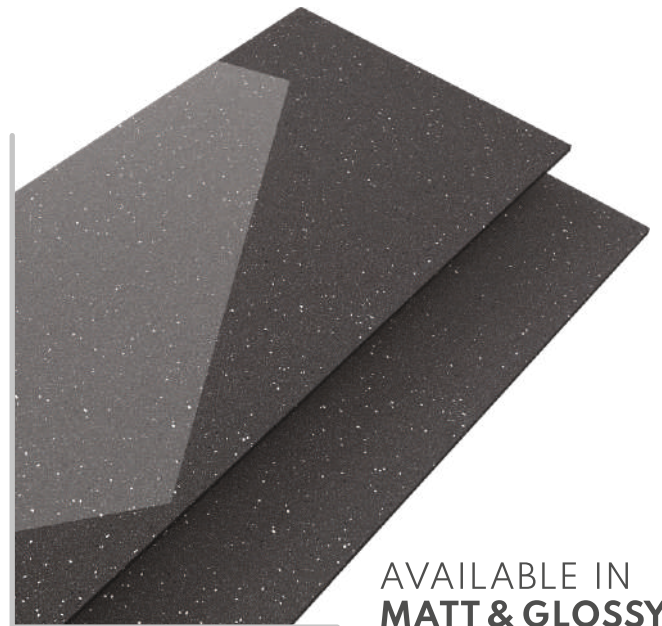

AVAILABLE IN
MATT & GLOSSY

TERRAZZO NERO

600x1200mm

-



ZERO
MAINTENANCE



IMPACT
RESISTANCE



LOW WATER
ABSORPTION



HIGH
STRENGTH

TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF IGNITE FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossometer
Water Absorption	≤ 0.50%	E ≤ 0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance(friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

Disclaimer: Mozart reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors of tiles shown in this catalogue are purely illustrative to printing process. Please refer actual sample before final selection. The details of sizes, colors and references should be verified for typographical errors.

PACKING DETAILS

	Size	Pcs. / Box	Weight / Box (approx.)		Coverage Area / Box
			Polished	Matt	
	600x1200mm	2 pcs	29 kg	31 kg	15.5 ft ² or 1.44 mtr ²



CERAMIC ZONE[®]

Ceramic Zone Complex, Nr Metro Ceramic,
Lakhdirpur Road, Morbi (guj.) India - 363 642



+91 99786 24097 / 99786 24022 / ✉ export@ceramiczone.co.in
ignitemosaic@gmail.com / domestic.ignite@gmail.com